



Hazardous Building Materials Register and Asbestos Management Plan



Ashfield Council

**Ashfield Park
Parramatta Road
ASHFIELD NSW 2131**



Survey Date: 29 September 2015

Report Date: 13 November 2015

Report Number: 9206.18.HMSR



9206ash18-HMSR.pdf

GETEX PTY LIMITED
ABN 99 116 287 471

Suite 2.02, Level 2, Waterloo Business Park
35 Waterloo Road, Macquarie Park NSW 2113
Phone: (02) 98892488 Fax: (02) 98892499
Email: help@getex.com.au Web: www.getex.com.au



Page 1 of 59

Document Control

Revision Number	Revision Date	Document Number	Author	Author Signature	Reviewer	Reviewer Signature
Revision 0	13/11/2015	9206.18.HMSR	Lee Hands		Michael Tierney	

Table of Contents

1. Executive Summary	4
1.1 Scope.....	4
1.2 General Guidelines for Use	5
2. Definitions	6
3. Recommendations	8
3.1 Recommendations by Priority.....	8
3.1.1 High Priority Recommendations (P1)	8
3.1.2 Medium Priority Recommendations (P2)	8
3.1.3 Remedial Action	9
3.1.4 Low Priority Recommendations (P3 and P4)	9
3.2 General Management Recommendations	10
4. Statement of Limitations	11
5. Methodology.....	13
5.1 Areas Not Accessed.....	14
6. Controls.....	15
7. Hazardous Building Materials Register.....	17
7.1 How to Use the Hazardous Building Materials Register.....	17
8. Asbestos Management Plan.....	31
9. Hierarchy of Control	31
10. Responsibilities	32
10.1 Responsibilities of Ashfield Council	32
10.2 Responsibilities of Maintenance Personnel & Tenants/Facility Managers.....	32
10.3 Responsibilities of Contractors & Emergency Personnel Working On-Site	33
11. Consultation and Information.....	34
12. Labelling.....	35
13. Steps Required During Asbestos Related Works	36
13.1 General Site Set Up	36
13.2 General Requirements for Decontamination Works.....	36
13.3 Painting or Cleaning of Asbestos Cement Sheeting	37
13.4 Drilling into Asbestos Cement Sheeting or Backing Boards.....	37
13.5 Asbestos Air Monitoring & Clearance Inspection(s).....	38
14. Emergency Response	38
15. Review of the Asbestos Management Plan	40

Appendix I Sample Register & Asbestos Sample Analysis Report

Hazardous Building Materials Register and Asbestos Management Plan

Prepared For: Ashfield Council

Client Contact: Ray McMaster

Site: Ashfield Park
Parramatta Road
ASHFIELD NSW 2131

1. Executive Summary

1.1 Scope

Getex Pty Ltd (Getex™) was engaged by Ray McMaster of Ashfield Council to undertake a Hazardous Materials survey for the determination of the type, condition and extent of hazardous building materials that might be present at Ashfield Park, Parramatta Road, ASHFIELD NSW 2131.

The hazardous materials assessed included asbestos, lead in paint, lead in dust, Synthetic Mineral Fibre (SMF) and Polychlorinated Biphenyls (PCBs). The aim of the survey was to:

- Inspect all accessible areas of the site and identify any suspected hazardous building materials;
- Sample materials suspected of containing hazardous building materials;
- Compile a hazardous building materials register for the site;
- Provide advice regarding the ongoing management of hazardous building materials identified in the survey; and
- Prepare an asbestos management plan to provide advice regarding the ongoing management of asbestos materials identified in the survey.

The Getex Hazardous Building Materials Register and Asbestos Management Plan constitutes an Asbestos Register and an Asbestos Management Plan under the Safe Work Australia Code of Practice (How to Safely Remove Asbestos); and the Code of Practice (How to Manage and Control Asbestos in the Workplace) which are both approved under Section 274 of the Work Health and Safety Act 2011.

The site was investigated on 29 September 2015:

Investigators	Qualifications
Lee Hands	Consultant, BSc (Hons) Licensed Asbestos Assessor NSW Lic No.: LAA001108
Geronimo Abrot	Consultant, BMechEng Licensed Asbestos Assessor NSW Lic No.: LAA000179
Peter Fox	Consultant, BSc

1.2 General Guidelines for Use

The Hazardous building materials register is a list of building materials identified in the investigation that fall into one of these three categories:

- 1) The material was identified as containing Hazardous Materials;
- 2) The material was investigated and found not to contain Hazardous Materials, or
- 3) The material was considered to be of a type that could be confused with a hazardous material (e.g. fibre cement sheeting containing no asbestos).

Entries are presented within the register relating to each material that falls into one of the three categories listed by area along with an example photo of the material.

Please follow these general guidelines in the use of the register:

- 1) Ensure that a copy of the register is available on Site and may be viewed by contractors working in the area. Copies of the register are to be supplied to any tenants on request.
- 2) If work is being conducted in a particular area identify all hazardous items within the register and ensure the relevant controls are followed by workers or contractors if working in the vicinity of the material e.g. do not drill, cut grind or sand.
- 3) Remove all identified asbestos materials from Site prior to demolition or refurbishment activities that may disturb the materials.
- 4) Follow any other recommended controls relating to the relevant entry. Including make safe or remediation activities as specified for each item.
- 5) Ensure that the Asbestos Management Plan (Section 8) is read and understood by all parties listed in the Hierarchy of Control.

2. Definitions

Asbestos Related Works

Any activities that may disturb asbestos containing materials in any way. Refer to Work Health and Safety Regulation 2011, Clause 419 for prohibitions and exceptions for asbestos related work.

Bonded Asbestos (Non Friable Asbestos)

WH&S Regulation 2011

Bonded asbestos material means any material (other than friable asbestos material) that contains asbestos.

WorkCover – Working with Asbestos, 2008

Bonded asbestos material is any material that contains asbestos in a bonded matrix. It may consist of Portland cement or various resin/binders and cannot be crushed by hand when dry. Asbestos cement (AC) products and electrical metering boards in good condition are examples of bonded asbestos material.

Safe Work Australia Code of Practice (How to Safely Remove Asbestos) approved under Section 274 of the Work Health and Safety Act 2011.

Means material containing asbestos that is not friable, including material containing asbestos fibres reinforced with a bonding compound.

Emergency Situation

Uncontrolled disturbance of any asbestos containing material.

Friable Asbestos

WH&S Regulation 2011

Friable asbestos material means any material that contains asbestos and is in the form of a powder or can be crumbled, pulverised or reduced to powder by hand pressure when dry.

WorkCover – Working with Asbestos, 2008

Friable asbestos material is any material that contains asbestos and is in the form of a powder or can be crumbled, pulverized or reduced to powder by hand pressure when dry. Sprayed limpet, millboard, pipe and boiler lagging are examples of friable asbestos.

Any asbestos cement products that have been subjected to weathering, or damaged by hail, fire or water blasting, are considered to be friable asbestos and an asbestos removal contractor with a WorkCover licence for friable asbestos is required for its removal.

***Safe Work Australia Code of Practice (How to Safely Remove Asbestos)
approved under Section 274 of the Work Health and Safety Act 2011.***

Means material that is in a powder form or that can be crumbled, pulverised or reduced to a powder by hand pressure when dry, and contains asbestos.

Permit To Work

A document completed by contractors before commencing work acknowledging that they:

- Have read and understood the Hazardous Building Materials Register and Asbestos Management Plan (i.e. this report);
- Are aware of their legal obligations under the Work Health and Safety Act 2011;
- Have been provided the appropriate awareness training with regards to asbestos, and
- Reviewed safety controls with regard to the asbestos identified.

Shadow Vacuuming Technique

The use of a HEPA filtered vacuum with its nozzle placed close to an operating tool to capture dust generated by that tool.

3. Recommendations

3.1 Recommendations by Priority

3.1.1 High Priority Recommendations (P1)



P1

High priority items (Control Priorities P1) pose an unacceptable asbestos or hazardous material exposure health and safety risk under present conditions and require urgent remedial action.

P1 items are generally in poor to moderate condition and if asbestos are generally friable in nature. The risk to public health and safety posed by these items is considered to be extreme.

Some examples of P1 items are friable asbestos in dust and friable asbestos lagging debris.

Restrict access to areas containing P1 items immediately and erect signage at the entrances to the area. To ensure that the site is safe for continued use, these materials are to be remediated (as per controls recommended within the register) and a relevant Clearance Certificate obtained as per your obligations under the Work Health & Safety Regulations 2011 as soon as practicable.

If there is any significant delay in remediating these items, it is recommended that background monitoring be conducted in adjacent areas to assess the possible exposure pathways for the hazardous materials and the suitability of these areas for normal activities to proceed.

3.1.2 Medium Priority Recommendations (P2)



P2

Medium priority items (Control Priorities P2) also pose an unacceptable asbestos or hazardous material exposure health and safety risk under present conditions and require remedial action as soon as practicable.

P2 items are generally in poor to moderate condition though generally non-friable in nature. The risk to public health and safety posed by these items is considered to be significant. Some examples of P2 items are asbestos cement debris and lead in dust greater than five times the guideline levels.

Limit access to these areas as much as is practicable immediately and erect signage at the entrances to the area. To ensure that the site is safe for continued use, these materials are to be remediated (as per controls recommended within the register) and an Asbestos Clearance Certificate obtained as per your obligations under the Work Health & Safety Regulations 2011 as soon as practicable.

3.1.3 Remedial Action



Remediated

Being familiar with the site, Getex can provide you with cost effective licensed asbestos remediation and an Asbestos or Hazardous Materials Clearance Certificate to certify that the site is safe for continued use.

Please contact Getex on (02) 9889 2488 for further information on how Getex can assist in ensuring your site is safe with respect to asbestos.

3.1.4 Low Priority Recommendations (P3 and P4)



P3

Low Priority items listed in the register (Control Priorities P3 and P4) may remain in place provided they are not disturbed e.g. do not drill, cut, grind or sand.

In some cases, these materials may require sealing of damaged sections or unsealed edges. Please refer to the control measures for the relevant item for more information on how these materials are to be managed.



P4

Some examples of P3 items are asbestos cement sheeting or asbestos vinyl tiles in good condition or with only minor damage. P4 items are by their placement restricted from any significant disturbance, for example, materials that are height restricted such as some asbestos eaves.

P3 and P4 items must be removed prior to any refurbishment or demolition activities within the relevant area.

3.2 General Management Recommendations

The labelling of all hazardous materials is recommended to warn of the dangers of disturbing these materials.

Getex recommends an annual reinspection of the identified Asbestos Containing Materials (ACM) remaining on-site as well as to monitor their condition as per the Code of Practice Code of Practice (How to Manage and Control Asbestos in the Workplace) approved under the Work Health and Safety Act 2011.

It is essential that prior to any demolition or refurbishment activities, the relevant ACM be removed by a suitably qualified licensed Class A or Class B asbestos removalist. If additional suspected ACM are encountered cease all demolition or refurbishment activities pending further investigation by a suitably qualified occupational hygienist such as Getex.

Where asbestos-containing materials are likely to be affected during renovations or maintenance work, then their removal by an accredited/licensed asbestos removalist should be considered prior to any work commencing, ensuring that the contractor has in place and can document their 'Asbestos Removal Control Plan' to safe guard against the release of asbestos fibres into the workplace.

All asbestos removal works must be done in accordance with the Safe Work Australia Code of Practice (How to Safely Remove Asbestos); and the Code of Practice (How to Manage and Control Asbestos in the Workplace).

Any material discovered that is suspected to be hazardous should be assumed to contain hazardous materials with relevant area(s) isolated until expert advice is obtained.

According to the Safe Work Australia Code of Practice (How to Safely Remove Asbestos); (p19) "Air monitoring is mandatory for all friable asbestos removal," and "Air monitoring should be considered where the asbestos removal work is being undertaken in or next to a public location".

Asbestos air monitoring should only be undertaken by an organisation NATA accredited for asbestos air monitoring and should be independent of the removal contractor.

Following removal of asbestos materials, the area must be assessed by a suitably qualified consultant and a clearance certificate issued subject to satisfactory assessment results.

Inspections of the identified hazardous materials should be undertaken every 5 years to ensure that the condition of the asbestos materials has not deteriorated and does not pose a risk to building occupants.

4. Statement of Limitations

Getex Pty Ltd and its staff members are professionally qualified and trained to achieve a suitable level of competency for the tasks undertaken.

Although all work is performed to a professional and diligent standard, the potential variance between the practical limitations of the scope of work undertaken, the cost of our services, all possible issues of concern, and any loss or damages which may be associated with our work are such that we cannot warrant that all issues of concern/asbestos materials have been identified. We therefore limit any potential liability associated with our work to the cost of our services.

All work conducted and/or reports/information produced by Getex Pty Ltd are prepared for a specific objective and within a specified scope of work as agreed between the Client and Getex Pty Ltd. As such this document is only for the use of the Client for the intended objective and may not be suitable for any other purpose. No parties other than the Client may use this document without first conferring with Getex Pty Ltd. Before passing this document onto a third party, the Client must inform the third party of any relevant information relating to this document. It is the responsibility of any party using this report to check to their satisfaction if this report is suitable for their intended use.

All information and/or report(s) prepared by Getex Pty Ltd should not be reproduced and/or presented/reviewed except in full.

Unless specifically mentioned, the inspection did not cover:

- Materials dumped, hidden, or otherwise placed in locations which one could not reasonably anticipate.
- Inaccessible/hidden locations, including wall cavities, under concrete slabs and lift wells.
- Materials other than standard building materials e.g. materials in special purpose facilities.
- Ground surface and underground areas.
- Mechanical, electrical or other items/materials not directly associated with the building structure.
- Materials other than asbestos as identification of a range of other possible hazardous substances can require specialised analysis/inspection techniques.

Where materials which may potentially contain asbestos are identified, these are reported to the best of the consultant's ability. Analysis/testing of materials is generally not included and there is no guarantee that all such materials have been identified.

The investigation conducted was limited in scope. As such, Getex Pty Ltd cannot guarantee that any or all asbestos materials/issues of concern, if present, have been identified as the practical restrictions of the program involved the inspection/review of a limited number of locations/materials which may or may not have identified/intercepted all asbestos materials if present. Furthermore, the distribution of dust, asbestos materials and/or other contaminants may vary with location and there can be no guarantee that a particular sample/location is typical of an extended area.

Settled dusts are known to exist in variety of locations in the general environment and possibly contain a range of substances which may be hazardous at varying levels, particularly if the dust is in the vicinity of hazardous materials such as asbestos containing materials or paint containing lead. Furthermore dusts present may originate from a variety of known and unknown complex sources (such as environmental/atmospheric) that are not related to the presence of bulk hazardous building materials e.g. combustions emissions from automobiles or industry. Due to the above mentioned potential complex sources of dust which may not be identifiable, settled dust is not sampled or commented on except where otherwise stated.

5. Methodology

All accessible areas of the buildings on Site were thoroughly inspected for the determination of the type, condition and extent of any hazardous building materials including asbestos, lead in paint, lead in dust, Synthetic Mineral Fibre (SMF) and Polychlorinated Biphenyls (PCBs) that might be present.

Where visual examination of a material proved to be inconclusive, samples were collected for laboratory analysis. Samples were collected by non-destructive and non-intrusive techniques where available.

Determination of materials containing or potentially containing asbestos or synthetic mineral fibre was based on a visual examination and/or sampling and analysis.

All asbestos samples were analysed by Getex's NATA accredited Laboratory. Asbestos samples were analysed for the qualitative identification of asbestos type fibres in bulk using Polarised Light Microscopy and Dispersion Staining Techniques.

In accordance with Appendix A of Australian Standard AS 4361.2-1998, areas of paint were spot tested for the presence of Lead by wiping exposed areas with a cotton swab soaked with 5% w/v aqueous sodium sulfide solution. A positive result is indicated by a darkening of the test area and a Lead content of greater than 1%.

All paint and dust samples were analysed by a NATA accredited organisation.

Paint samples were analysed for lead content by digestion of paint chips with aqua regia followed by determination of lead in the digest using Inductively Coupled Plasma (ICP) in accordance with Appendix A – Australian Standard AS 4361.2-1998.

Moistened wipes were used to collect surface dust from a known area on the upper side of the ceiling in accordance with Appendix C – Australian Standard AS 4361.2 1998. The dust samples were analysed by sample digestion with Nitric Acid and Hydrogen Peroxide followed by determination of lead in the digest using ICP in accordance with Appendix C – AS 4361.2-1998.

After the completion of the hazardous materials survey, a register was prepared outlining occurrences of hazardous materials in each asset, the condition of the hazardous material the treatment option required and the priority of treatment. The Hazardous Materials Register details the location, description, type, condition, and risk priority of presumed or identified hazardous materials.

5.1 Areas Not Accessed

All reasonable effort was made to investigate the entire property. Where this is not possible due to restrictions caused by construction or safety, an entry is made within the register noting that the area has not been inspected and the reason for this. Such areas include, but are not limited to:

- Height restricted areas;
- Gas, electrical, chemical or pressurised service lines;
- Within service shafts, ducts and wall cavities;
- Areas obstructed by installed equipment; and
- Locked areas to which no key is available at the time of inspection.

Further investigation of these areas is required if refurbishment or demolition activities within these areas are to proceed.

6. Controls

- 1) This Hazardous Building Materials Register and Asbestos Management Plan is to remain on site in a readily accessible location for perusal by interested parties at any time. It is of particular importance that this Hazardous Building Materials Register and Asbestos Management Plan be updated following the removal and disposal of any hazardous building materials or any changes in condition. If works are to involve items of suspect material not covered within the scope of this report it is recommended that confirmation of the material as containing/not containing hazardous materials takes place prior to refurbishment or demolition works.
- 2) All building occupants, visitors to the site, and in particular, service maintenance personnel are to be advised of hazardous building materials management procedures in accordance with the standards and guidelines.
- 3) Prior to any works being undertaken on the site it is important that the Hazardous Building Materials Register and Asbestos Management Plan is reviewed. It is essential that all persons / tradespeople who are required to work on the building be notified about the presence of the hazardous building materials in the identified areas and procedures required to be followed.
- 4) Regular inspections of the identified hazardous building materials is to be undertaken (a minimum of every 5 years) to ensure that the condition of the hazardous materials has not deteriorated and does not pose a risk to building occupants.
- 5) Guidance noted in: the Safe Work Australia Code of Practice (How to Safely Remove Asbestos); and the Code of Practice (How to Manage and Control Asbestos in the Workplace); AS 4361.2 1998 Guide to Lead Paint Management Part 2: Residential and Commercial Buildings; Polychlorinated Biphenyls Management Plan ANZECC (Revised Edition April 2003); National Code of Practice for the Safe Use of Synthetic Mineral Fibres [NOHSC:2006(1990)], and the National Code of Practice for the Control of Inorganic Lead at Work Lead in Paint [NOHSC:2015(1994)] should be followed for all hazardous building materials.
- 6) Any material discovered that is suspected to be a hazardous building material should be assumed to contain hazardous materials with relevant area(s) isolated until expert advice is obtained.
- 7) All hazardous materials removal/treatment works or other works which may disturb hazardous containing materials should follow an appropriate detailed work specific control strategy setting out the procedures and precautions that are to be taken to ensure health and safety with respect to hazardous exposures. The control strategy should include Safe Work Method Statements, a Hazardous Materials Work Plan and Management Plans. Prior to undertaking such works it is recommended that the advice of a suitably qualified occupational hygienist, such as Getex Pty Ltd, be sought.
- 8) If any hazardous building materials are to remain in place an appropriate ongoing hazardous materials management plan is to be prepared and implemented to ensure that the risks associated with these materials are controlled and maintained at an acceptable level.

- 9) All hazardous building removal/treatment activities are to be undertaken by an experienced and licensed removal contractor.
- 10) According to the Safe Work Australia Code of Practice (How to Safely Remove Asbestos); (p19) "Air monitoring is mandatory for all friable asbestos removal," and "Air monitoring should be considered where the asbestos removal work is being undertaken in or next to a public location."
- 11) Asbestos/SMF and Lead air monitoring is to be undertaken by an organisation NATA accredited for air monitoring and who is independent of the removal contractor.
- 12) Following removal of asbestos containing building materials, lead containing paints and lead dust, the area is to be assessed by a suitably qualified consultant, such as Getex Pty Ltd, and an asbestos or lead clearance certificate issued subject to satisfactory assessment results.

7. Hazardous Building Materials Register

7.1 How to Use the Hazardous Building Materials Register

ID	Location	Material Type	Analysis Result	Sample No.	Extent	Condition	Friability	Disturbance Potential	Re-inspect Date	Control Priority	Control Method	Removal Date	Removed	Photos
Exterior														
2	Eaves Southern extension	Asbestos Cement Sheeting	Positive <i>Chrysotile Asbestos Detected</i>	9038/ AS04B	~40m ²	Good	Non- Friable	Low	Low	May 2018	P3	Material in good condition, and not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment or demolition works.	Date: / / Removed by: Report:	Photo 12 
Comments: All eaves throughout the dwelling are assessed to contain asbestos.														

Area Reference (points to ID)

Site Unique Entry ID Number (points to ID)

Location Description (points to Location)

Material Type (points to Material Type)

Analysis Result (points to Analysis Result)

Approx. Extent (points to Extent)

Information relating to condition and risk status of the item (points to Condition, Friability, Disturbance Potential)

Re-inspection Date (points to Re-inspect Date)

Priority Ranking (points to Control Priority)

Recommended Controls (points to Control Method)

Easy to understand colour coding of materials according to priority. (points to P3)

Your notes regarding removal of materials (points to removal instructions)

Example Photo of the material (points to Photo 12)

Example Only (large watermark across the table)

Ensure that a copy of the register is available on Site and may be viewed by contractors working in the area. Copies of the register are to be supplied to any tenants on request. If work is being conducted in a particular area identify all hazardous items within the register and ensure the relevant controls are followed by workers or contractors if working in the vicinity of the material e.g. do not drill, cut grind or sand.

HAZARDOUS BUILDING MATERIALS REGISTER

Prepared by Getex

Ashfield Park

Site Address: Parramatta Road

Consultants: Lee Hands, Geronimo Abrot & Peter Fox

ASHFIELD NSW 2131


Investigated: 29 August 2015



Asset Photo

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
General Park Area - War Memorial														
1	Sandstone blocks Pointing material between blocks	Pointing Material	Previously sampled by NAA 41310-(130905)-01	Negative No Asbestos Detected	-	-	-	-	-	-	-	-	-	Photo 1
														Pointing Material
General Park Area - Oval														
2	Electrical meter box Electrical backing board (inaccessible)	Electrical Backing Board	-	Assumed Positive Assumed to Contain Asbestos (Visually Assessed)	~0.25m ²	Good	Non-Friable	Low	Low	Aug 2018	 P3	Maintain in good condition, and do not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment, demolition works or any electrical works that require drilling.	Date: ____/____/____ Removed by: _____ Report: _____	Photo 2
Comments: No access at time of Inspection. Isolate using a licensed electrician and conduct investigation to confirm when access becomes available.														Electrical Backing Board


ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
General Park Area - All Structures														
3	Florescent lights Throughout	Fluorescent Lights	-	Positive <i>Presumed to Contain PCBs (Visually Assessed)</i>	> 10 lights	Good Condition, No Leaking Observed	-	Low	Low	Aug 2018	 P3	Presumed to contains PCBs. The material may remain in place provided it is not disturbed. Ensure that capacitors are managed in accordance with the Polychlorinated Biphenyls Management Plan ANZECC (Revised Edition April 2003).	Date: _____ Removed by: _____ Report: _____	Photo 3 
Comments: Not assessed due to live electricity. Isolate using a licensed electrician and conduct investigation to confirm status.														Fluorescent Lights
General Park Area - Toilet Block - Exterior														
4	Door and door frames Red paint	Paint	9206.18/LPST03	Positive <i>Invalid Test result</i>	-	-	-	-	-	-	5	-	-	Photo 4 
														Red Door Paint
5	Electrical meter box Electrical backing board (inaccessible)	Electrical Backing Board	-	Assumed Positive <i>Assumed to Contain Asbestos (Visually Assessed)</i>	~0.25m ²	Good	Non-Friable	Low	Low	Aug 2018	 P3	Maintain in good condition, and do not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment, demolition works or any electrical works that require drilling.	Date: _____ Removed by: _____ Report: _____	Photo 5 
Comments: No access at time of Inspection. Isolate using a licensed electrician and conduct investigation to confirm when access becomes available.														Electrical Backing Board


ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
General Park Area - Toilet Block - Exterior (Cont..)														
6	Upper beams Green paint	Paint	Same as Sample 9206.18/LPST01	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 6 
														Green Beam Paint
General Park Area - Toilet Block - Interior														
7	Walls throughout White paint	Paint	9206.18/LPST04	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 7 
														White Wall Paint
General Park Area - Toilet Block - Ceiling Cavity														
8	Upper ceiling surfaces Dust	Dust	-	Positive Presumed Lead in Dust > 9mg/m ²	~30m ²	Poor	8	Moderately Accessible	Medium	Aug 2016	 P2	Presumed lead in dust level > 8mg/square metre. All dust should be removed prior to demolition works being undertaken.	Date: ____/____/____ Removed by: ____ Report: ____	Photo 8 
Comments: Not sampled due to the hazard of large quantities of bird faeces. Restrict access and have area cleaned up professionally.														Dust


ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
General Park Area - Undercover Picnic Area														
9	Beams throughout Brown paint	Paint	9206.18/ LPST02	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 9 
														Brown Beam Paint
10	Beams throughout Green paint	Paint	9206.18/ LPST01	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 10 
														Green Beam Paint
11	Roof throughout Waterproof membrane below tiles on ridge capping	Waterproof Membrane	Previously sampled by NAA 41310-(130905)-03	Negative No Asbestos Detected	-	-	-	-	-	-	-	-	-	Photo 11 
														Waterproof Membrane

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
General Park Area - Undercover Picnic Area (Cont..)														
12	Rooftop Ridge capping - Lead flashing	Lead Flashing	-	Positive <i>Metallic Lead Detected (Visually Assessed)</i>	24 lineal metres	Good Condition	-	Low	Low	Aug 2018	 P3	Contains metallic lead. The material may remain in place provided it is not disturbed. Manage in accordance with the National Code of Practice for the Control of Inorganic Lead at Work Lead in Paint [NOHSC:2015(1994)].	Date: _/_/_ Removed by: _____ Report: _____	Photo 12 
														Lead Flashing
13	Walls throughout Pointing materials between sandstone blocks	Pointing Material	Previously sampled by NAA 41310-(130905)-02	Negative No Asbestos Detected	-	-	-	-	-	-	-	-	-	Photo 13 
														Undercover Picnic Area
Dressing Shed - Exterior														
14	Doors Mustard colour paint	Paint	9206.18/LPST05	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 14 
														Mustard Coloured Paint

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Exterior (Cont..)														
15	Eaves Throughout	Asbestos Cement Sheeting	-	Assumed Positive <i>Assumed to Contain Asbestos (Visually Assessed)</i>	~50m ²	Good/ Minor Damage	Non-Friable	Low	Low	Aug 2018	 P3	Confirm status, label, seal any damaged areas and maintain in good condition. Do not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment or demolition works.	Date: _____ Removed by: _____ Report: _____	Photo 15 
Comments: Not accessed due to height restrictions. Assumed to contain asbestos until proven otherwise.														Asbestos Cement Sheeting
16	Former male toilets (Cricket gear store) Entrance door - Security bars - Grey coloured paint	Paint	9206.18/ LPST13	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 16 
														Grey Paint
17	Former male toilets (Cricket gear store) Entrance door - Security box around lock - Red coloured paint	Paint	9206.18/ LPST14	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 17 
														Red Paint

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Exterior (Cont..)														
18	Porch Ceiling	Fibre Cement Sheeting	Previously sampled by NAA 41310-(130905)-05	Negative No Asbestos Detected	-	-	-	-	-	-	-	-	-	Photo 18 
														Fibre Cement Sheeting
19	Porch Ceiling - White paint - Overcoat	Paint	9206.18/LPST09	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 19 
														White Overcoat Paint
20	Porch Ceiling - White paint - Undercoat	Paint	9206.18/LPST11	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 20 
														White Undercoat Paint

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Exterior (Cont..)														
21	Timber Window infill panels Green coloured paint	Paint	9206.18/LPST08	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 21 
														Green Coloured Paint
22	Water tank Brown coloured paint	Paint	9206.18/LPST15	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 22 
														Brown Coloured Paint
Dressing Shed - Exterior/Interior														
23	Fluorescent Light fittings Capacitors	Fluorescent Lights	-	Positive May Contain PCBs Detected (Visually Assessed)	6 Fittings	Good Condition, No Leaking Observed	-	Low	Low	Aug 2018	 P3	May contain PCBs. The material may remain in place provided it is not disturbed. Ensure that capacitors are managed in accordance with the Polychlorinated Biphenyls Management Plan ANZECC (Revised Edition April 2003).	Date: ____/____/____ Removed by: ____ Report: ____	Photo 23 
Comments: Not assessed due to live electricity. Isolate by licensed electrician, inspect capacitor and update register accordingly.														Fluorescent Lights - Assumed to Contain PCBs

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Interior														
24	Change rooms Walls - Green coloured paint	Paint	9206.18/ LPST11	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 24 
														Green Coloured Paint
25	Door Jamb White coloured paint	Paint	9206.18/ LPST06	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 25 
														White Coloured Paint
26	Doors Brown coloured paint	Paint	9206.18/ LPST07	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 26 
														Brown Coloured Paint

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Interior (Cont..)														
27	Former male toilet (Cricket gear store) Ceiling - Mustard coloured paint with green undercoat	Paint	9206.18/LP01	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 27 
														Mustard Coloured Ceiling Paint
28	Groundman's Office Eastern wall	Asbestos Cement Sheeting	-	Positive <i>Asbestos Detected (Visually Assessed)</i>	~25m ²	Good	Non-Friable	Low	Low	Aug 2018	 P3	Label and maintain in good condition, and do not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment or demolition works.	Date: ____/____/____ Removed by: ____ Report: ____	Photo 28 
														Asbestos Cement Sheeting
29	Groundman's Office Electrical meter box - Bottom pannel - Upper surfaces	Dust	9206.18/AS01	Positive <i>Chrysotile Asbestos Detected</i>	~0.25m ²	Poor	Friable	Low	Medium	Aug 2016	 P2	Restrict access and erect appropriate signage at the entrances to the area. Conduct a cleanup of the area by a licensed Class A asbestos removalist as soon as practicable.	Date: ____/____/____ Removed by: ____ Report: ____	Photo 29 
														Dust

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Interior (Cont..)														
30	Groundman's Office Electrical meter box - Electrical backing board	Electrical Backing Board	-	Positive Asbestos Detected (Visually Assessed)	-	Good	Non-Friable	Low	Low	Aug 2018	 P3	Label, maintain in good condition, and do not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment, demolition works or any electrical works that require drilling.	Date: _____ Removed by: _____ Report: _____	Photo 30 
														Electrical Backing Board
31	Groundman's Office Exposed electrical backing board	Timber	-	Negative No Asbestos Detected (Visually Assessed)	-	-	-	-	-	-	-	-	-	Photo 31 
														Timber Electrical Backing Board
32	Groundsman's shed Fluorescent light fittings	Fluorescent Lights	-	Negative No PCBs Detected (Visually Assessed)	-	-	-	-	-	-	-	-	-	Photo 32 
Comments: Not assessed due to live electricity. Assumed negative due to modern light fitting.														Fluorescent Lights

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Interior (Cont..)														
33	Groundsman's shed Masonry walls - White paint	Paint	9206.18/LPST12	Negative Lead in Paint <1.0%	-	-	-	-	-	-	-	-	-	Photo 33 
														White Wall Paint
34	Groundsman's shed Western wall	Asbestos Cement Sheetting	Previously sampled by NAA 41310-(130905)-04	Positive <i>Asbestos Detected</i>	~25m ²	Good/ Minor Damage	Non-Friable	High	Medium	Aug 2016	 P2	Label, seal any damaged areas and maintain in good condition. Do not disturb (e.g. do not drill, cut grind or sand). Remove by a licensed Class A or Class B asbestos removalist as soon as practicable and prior to any refurbishment or demolition works.	Date: _/_/_ Removed by: _____ Report: _____	Photo 34 
Comments: Unsealed asbestos wall panels. Apply sealant (i.e. paint) as soon as practicable.														Asbestos Cement Sheetting
35	Pump House Electrical switchbox	Not Determined	-	Not Determined <i>Area Not Accessed</i>	-	-	-	-	-	Aug 2016	-	Investigate as soon as practicable and prior to any refurbishment/ demolition works by a suitably qualified occupational hygienist. Update the register accordingly.	Date: _/_/_ Removed by: _____ Report: _____	Photo 35 
Comments: No access available at the time of inspection.														Pump House Electrical Switchbox

ID	Location	Material Type	Sample No.	Analysis Result	Extent	Condition	Friability	Disturbance Potential	Risk Status	Re-inspect Date	Control Priority	Control Recommendation	Removed	Photos
Dressing Shed - Interior (Cont..)														
36	Pump House Pump - Gaskets	Rubber	-	Negative No Asbestos Detected (Visually Assessed)	-	-	-	-	-	-	-	-	-	Photo 36 
														Rubber Gaskets

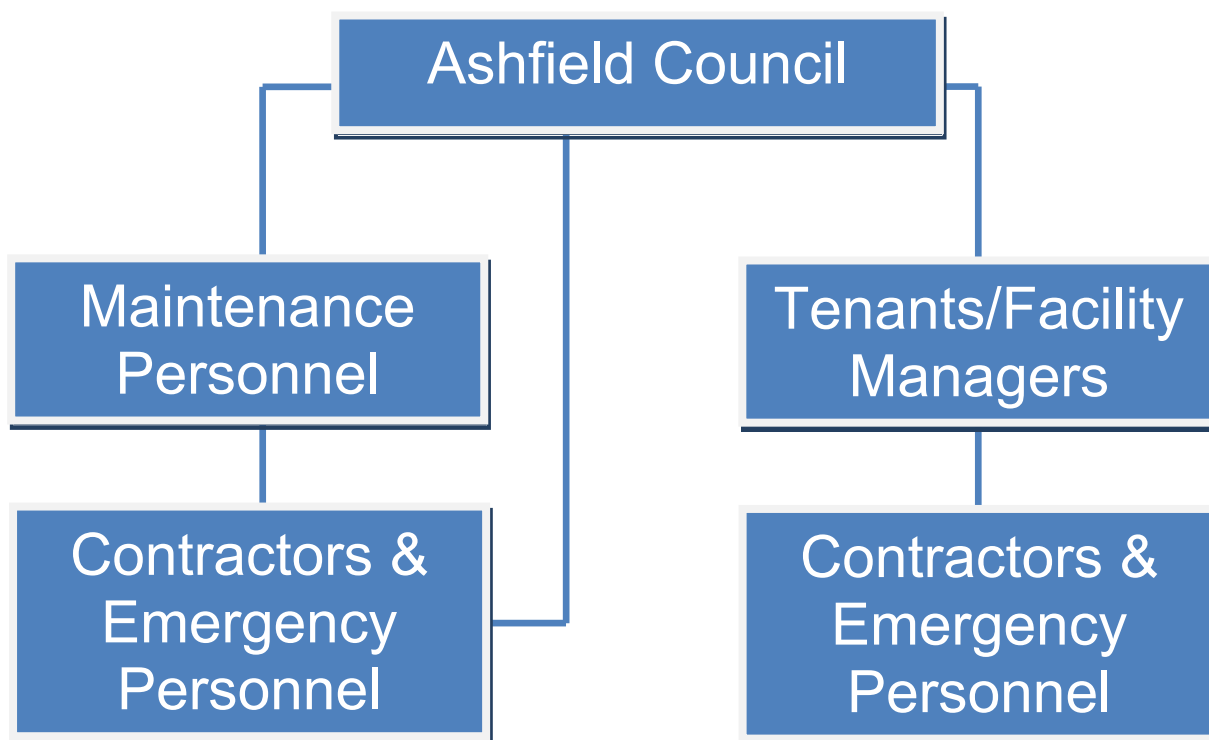
8. Asbestos Management Plan

Asbestos materials were identified on the Site, please refer to Section 7 of the report for specific controls to be implemented with respect to each item identified.

Further to the measures outlined in Section 7, the controls of the Asbestos Management Plan (AMP) outlined in Sections 9 to 14 below are to be implemented by the personnel identified below in order for the effective ongoing control of the above asbestos containing materials located at the Site.

9. Hierarchy of Control

Ashfield Council are to ensure that a hierarchy of control is established between individuals identified within each level of control and those individuals made responsible for the effective implementation of the Asbestos Management Plan:



10. Responsibilities

10.1 Responsibilities of Ashfield Council

The following statements are the responsibility of the Owners of Ashfield Park, Parramatta Road, ASHFIELD NSW 2131 (i.e. Ashfield Council) in relation to the implementation and management of this AMP:

- Ensure a copy of the Asbestos Building Materials Register & Asbestos Management Plan for the Site is available to all site personnel, including maintenance workers (i.e. a current hard copy is stored in an easily accessible location and all workers are informed of its location).
- Ensure that these parties clearly understand the content and requirements of the AMP and ensure that compliance with the AMP is a condition of any legal agreement with these parties.
- Contractors undertaking friable asbestos related works must have a current Class A license and Contractors undertaking any other asbestos related works must have either a current Class A or Class B asbestos license.
- Engage an Occupational Hygienist to undertake a risk assessment of suspect material if concerns are raised regarding the condition of asbestos containing material or if there is a significant change in the condition of the asbestos containing material.
- Maintain records relating to the management of asbestos at the site.
- Update the AMP if The Owners become aware that Site conditions have changed and inform all relevant other parties of the changes; and
- Ensure that the minimum recommendations of this AMP and all legislative requirements are implemented on Site and ensure that where practicable or feasible any further recommended control or remediation measures recommended within this AMP are implemented.

10.2 Responsibilities of Maintenance Personnel & Tenants/Facility Managers

The following statements are the responsibility of Maintenance Personnel & Tenants/Store Managers in relation to the implementation and management of this AMP:

- Inform Ashfield Council if they become aware that Site conditions as they relate to asbestos containing materials have changed, and inform all relevant other parties of the changes.
- Comply with the AMP for all works undertaken, and
- Relay any inquiries relating to the management of asbestos contamination issues within Ashfield Park, Parramatta Road, ASHFIELD NSW 2131 to Ashfield Council.

10.3 Responsibilities of Contractors & Emergency Personnel Working On-Site

The following statements are the responsibility of contractors and emergency personnel working on-site in relation to the implementation and management of this AMP:

- To ensure a Safe Work Permit document has been filled out before starting works.
- To ensure that work practices comply with those outlined with in this document and relevant Codes of Practice and legislation guidelines.
- Staff members employed have been suitably trained in the jobs that they are required to perform (including asbestos related work) and that they have been inducted to the Site.
- The Asbestos Building Materials Register & Asbestos Management Plan has been read and asbestos containing materials located physically on Site.
- Comply with the AMP for all works undertaken;
- Inform the relevant person controlling the works if conditions change significantly from those documented in the AMP; and
- Attend the Site in possession of the appropriate PPE as outlined in Section 13.

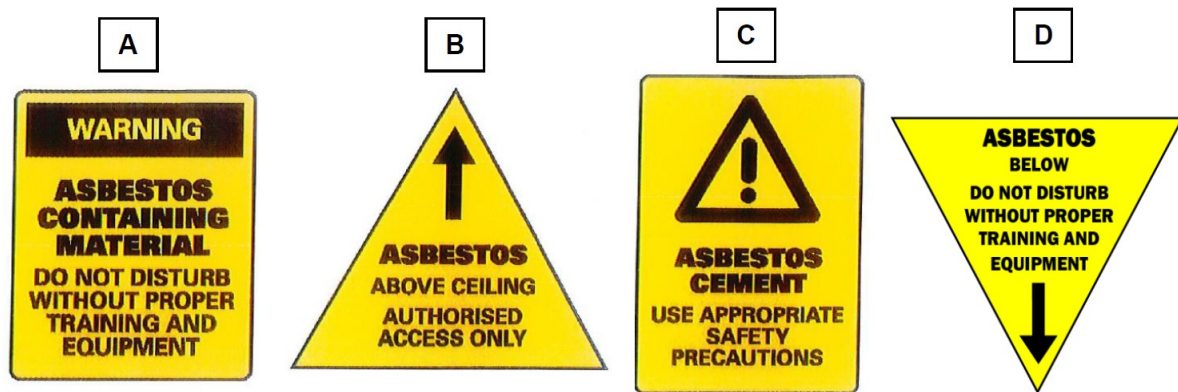
11. Consultation and Information

As per Section 4.3 of the Safe Work Australia Code of Practice (How to Manage & Control Asbestos in the Workplace), in the case of any works (including emergency works) taking place at asbestos affected areas, Ashfield Council are to ensure that all maintenance staff, tenants, contractors and emergency personnel undertaking work at asbestos affected areas have undergone an appropriate site specific induction in relation to the asbestos containing material that is present at the Site. The induction program is to be inclusive of the following:

- Information about asbestos containing material to which contractors/employees are or may be exposed to in the course of their work. Information is to include the nature of the hazard, identification of asbestos containing material and risks to health arising from exposure.
- Information about the locations of asbestos.
- Details of the asbestos containing material on site, including processes and safe work procedures to be followed to prevent exposure.
- Procedures to be followed in case of an emergency involving exposure of asbestos containing material.
- Incident reporting procedures to be followed in case of exposure or potential exposure of asbestos containing material.
- Personal protective equipment (PPE) requirements whilst working with asbestos.
- Records of all inductions must be kept for five years after the day the worker stops carrying out the **asbestos related work**. These records must also be available for inspection by the regulator (i.e. WorkCover NSW). Any contractor, maintenance staff, employee or other authorised persons who may potentially disturb the asbestos containing material on site must acknowledge within their Safe Work Method Statement and Risk Assessment the presence of asbestos within asbestos affected areas, must have signed onto a Permit to Work before commencing work and implement the appropriate controls as per Section 14.

12. Labelling

All Labels are to comply with Australian Standards AS1216 and AS1319. Examples of Labels are provided below:



The approximate dimensions of each label seen above will be as per follows:

- A: Height 72mm, Width 60mm;
- B: Height 67mm, Width at widest point 75mm;
- C: Height 76mm, Width 54mm;
- D: Height 67mm, Width at widest point 75mm;

Labeling in publicly sensitive areas is to be undertaken at the discretion of Ashfield Council.

Labeling is to be undertaken by a suitably trained and experienced Occupational Hygienist or competent person.

13. Steps Required During Asbestos Related Works

13.1 General Site Set Up

Prior to the commencement of asbestos related works the following procedures are to be observed:

- All friable asbestos related work is to be undertaken by a Class A licensed contractor.
- All bonded (non-friable) asbestos related work is to be undertaken by either a Class A or Class B licensed contractor.
- An exclusion zone from the work areas is to be established, barricaded and access restricted.
- A Permit to Work document has been filled out by all relevant parties.
- An appropriate Safe Work Method Statement and Risk Assessment are to be prepared by all parties involved and followed in accordance with site safety procedures. All personnel must read and sign each relevant document.
- Establish area for decontamination facilities (area for wetting down and disposal of PPE).
- All appropriate signage is to be erected, including appropriate asbestos warning signs.

13.2 General Requirements for Decontamination Works

During asbestos related works the following procedures are to be observed:

- All workers to wear appropriate Personal Protective Equipment (PPE), including respiratory protection (P2 or higher protection, P3 for friable asbestos related work), gloves, disposable overalls and safety shoes.
- Ensure all safety procedures are in place prior to starting work.
- At the completion of each work shift, use:
- Established area for decontamination facilities.
- Established area for wash down (decontamination) of equipment.
- All used PPE and waste generated is to be placed in 200µm thick plastic bags and disposed of as asbestos contaminated waste.

13.3 Painting or Cleaning of Asbestos Cement Sheeting

During painting or cleaning of asbestos cement sheeting the following procedures are to be observed as well as all steps with 14.1 and 14.2:

- The asbestos cement sheeting is to be inspected prior to commencing work to ensure that the sheets show no signs of deterioration or damage. If deterioration or damage is observed work must be stopped and emergency response procedures implemented.
- Drop sheets are to be installed within the work area to capture any dust generated and prevent the contamination of the ground/floor surfaces.
- Wet sanding may be used to prepare the surface before painting however the water must be captured and filtered prior to discharge. No dry sanding or high powered water cleaning methods are to be used during this task.
- When preparing the surface wet wiping may be used. During all wet wiping the rag must be not re-soaked and must be disposed of as asbestos waste after use.
- Apply paint gently using a roller or brush. High pressure spray methods are not to be used.

13.4 Drilling into Asbestos Cement Sheeting or Backing Boards

During drilling of asbestos cement sheeting works the following procedures are to be observed as well as all steps within 14.1 and 14.2:

- Drop sheets are to be installed below the drill area to capture any asbestos cement debris and prevent the contamination of the ground/floor surfaces.
- Apply tape to the front and back (if accessible) of the sheet. The tape used should be a heavy duty tape such as duct tape.
- Apply a generous amount of paste material to the drill and drill through surface.
- Use a non-powered hand drill or a low-speed battery-powered drill or drilling equipment fitted with a local exhaust ventilation (LEV) dust control hood. If a LEV is not available use the *shadow vacuuming technique* during the drilling process.
- All horizontal surfaces within the work area are to be vacuumed clean with a vacuum fitted with a HEPA filter until no visible signs of dust are present.
- All surfaces are to be wet wiped and the used rags disposed of as asbestos waste.
- A fine mist of PVA solution is to be applied to all surfaces following all drilling works.

13.5 Asbestos Air Monitoring & Clearance Inspection(s)

NATA accredited asbestos air monitoring is to be undertaken during all asbestos related works by a company such as Getex Pty Ltd.

If the results of the asbestos air monitoring during the asbestos related works indicate that airborne asbestos levels are equal to or exceed 0.02 fibres/mL, the Contractor shall cease work immediately, the work practice shall be reviewed with appropriate measures taken to rectify the problems.

- Following all asbestos related works an Occupational Hygienist from a company such as Getex Pty Ltd is to conduct a Clearance Assessment. The Clearance Assessment will involve:
 - A visual inspection to check if all visually identified asbestos containing material has been removed to a satisfactory industry standard.
 - The in situ asbestos containing material remaining onsite has been sealed to a satisfactory industry standard; and

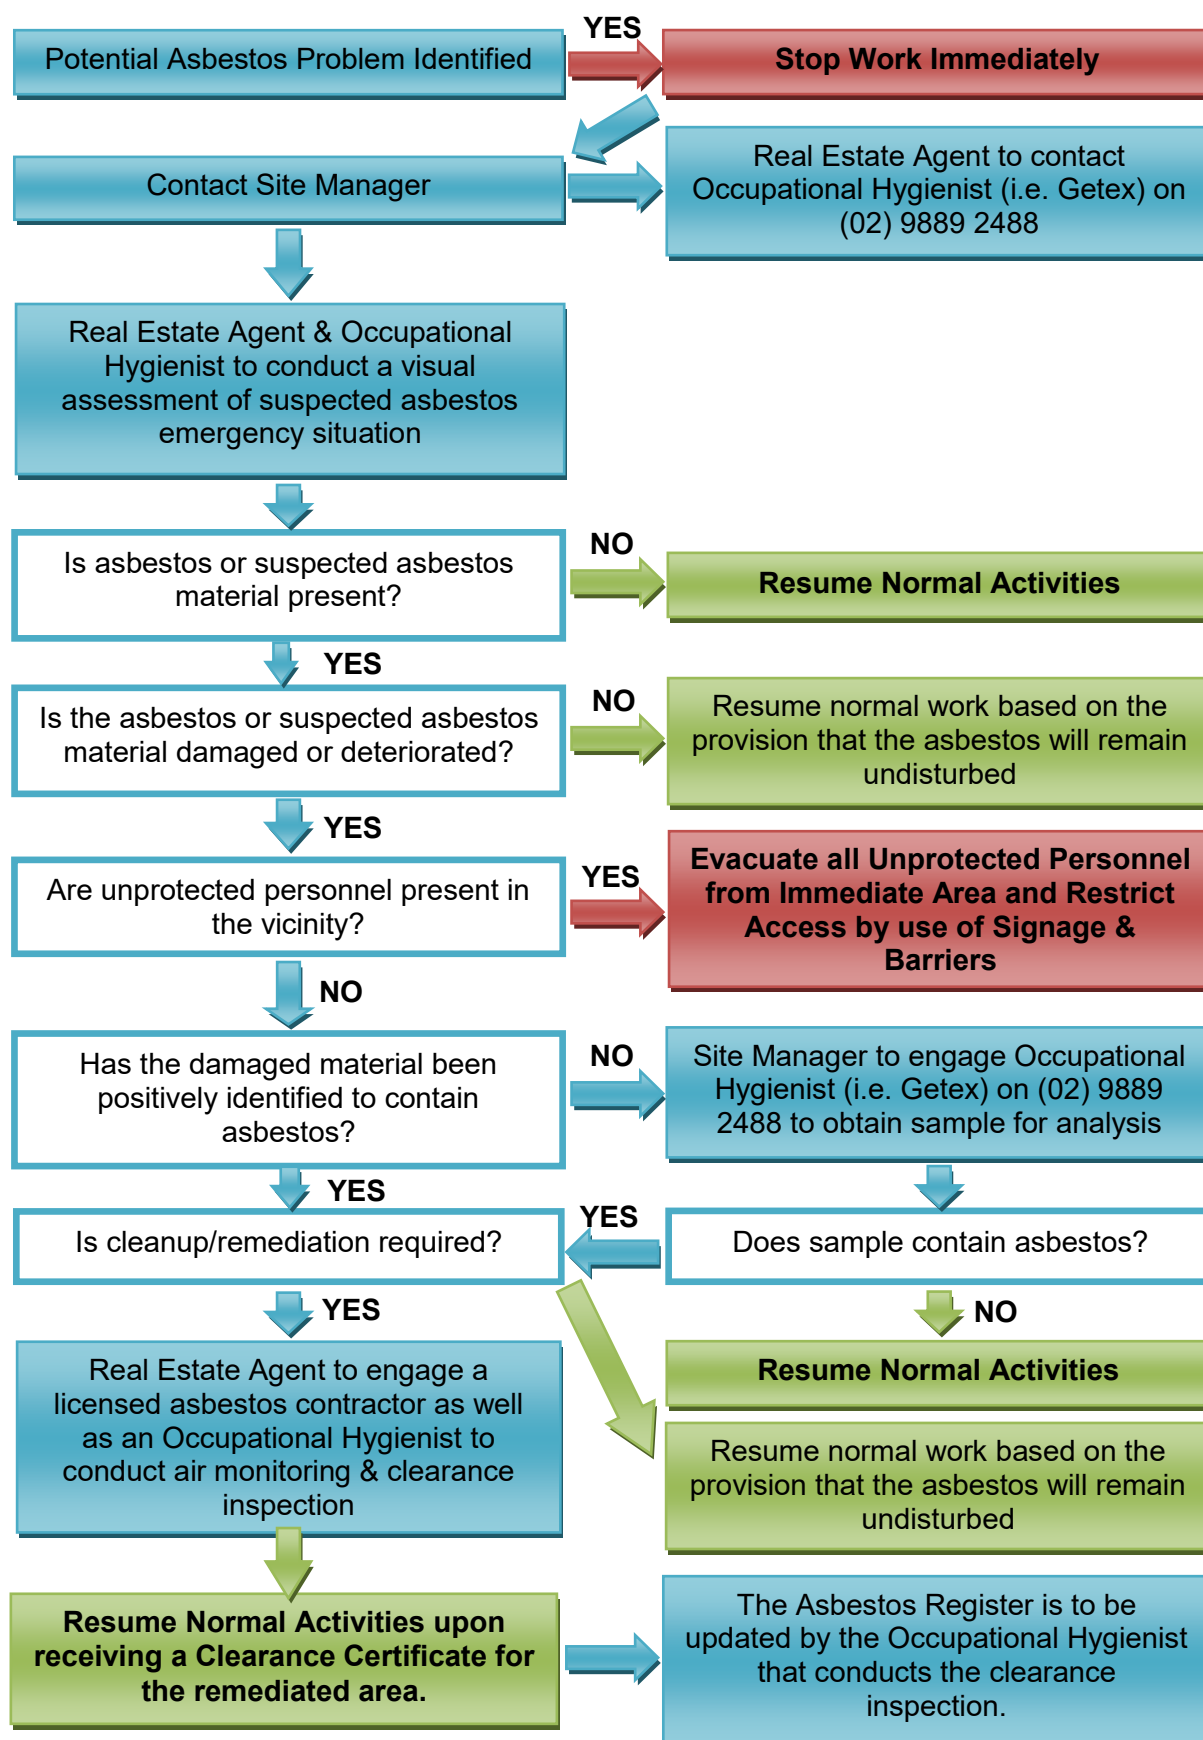
In the case of Friable Asbestos Removal, Clearance Asbestos Air Monitoring will also be required.

- Subsequent to a satisfactory Clearance Assessment results an Asbestos Clearance Certificate will be issued.

14. Emergency Response

In the event of an uncontrolled disturbance of any asbestos containing material, the following procedures are to be observed:

- An exclusion zone from the contaminated area is to be established, barricaded and access restricted.
- All appropriate signage is to be erected surrounding the exclusion zone, including appropriate asbestos warning signs.
- Establish and utilise an area for decontamination facilities for wetting down and disposal of contaminated clothing (If required).
- An independent consultant competent in asbestos related contamination issues, such as Getex Pty Ltd, is to be contacted to facilitate asbestos management/removal activities.
- **The following Flow Chart should be utilised to safely and efficiently minimize any risk and return the Site to a safe condition for works to Proceed.**



15. Review of the Asbestos Management Plan

The Asbestos Management Plan is to be reviewed and, if necessary, revised at least once every five years or when:

- Asbestos is removed from or further disturbed on the site;
- The plan is no longer adequate for managing the asbestos containing material; or
- A health and safety representative requests a review if they reasonably believe that any of the matters listed in the above points affects or may affect the health and safety of a member of their work group.

The five year review is to be conducted by a suitably qualified occupational hygienist such as Getex. Reviews and amendments in the interim may be conducted by a suitably qualified Staff member.



APPENDIX I

Sample Register & Laboratory Analysis Reports



SAMPLE REGISTER

Prepared by Getex

Sample No.	Material Type	Analysis Result	Area Reference	Location	Sample Location
9206.18/ AS01	Dust	Chrysotile Asbestos Detected	Dressing Shed - Interior	Groundman's Office - Electrical meter box - Bottom pannel - Upper surfaces	The sample of dust was collected from a central location below the electrical backing board.
9206.18/ LP01	Paint	Lead in Paint <1.0%	Dressing Shed Interior	Former male toilet (Cricket gear store) - Ceiling - Mustard coloured paint with green undercoat	The sample of white wall paint was taken from adjacent to the entrance door.
9206.18/ LPST01	Paint	Lead in Paint <1.0%	General Park Area - Undercover Picnic Area	Beams throughout - Green paint	The spot test of green beam paint was carried out centrally on the southern upper beam within the southern section of the picnic shelter.
9206.18/ LPST02	Paint	Lead in Paint <1.0%	General Park Area - Undercover Picnic Area	Beams throughout - Brown paint	The spot test of brown beam paint was carried out centrally on the upper beam on south-western exterior.
9206.18/ LPST03	Paint	Invalid Test result	General Park Area - Toilet Block - Exterior	Door and door frames - Red paint	The spot test of red door paint was carried out on the eastern side of the northern men's toilet door.
9206.18/ LPST04	Paint	Lead in Paint <1.0%	General Park Area - Toilet Block - Interior	Walls throughout - White paint	The spot test of white wall paint was carried out on the wall adjacent north of the entrance door to the maintenance room.
9206.18/ LPST05	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Doors - Mustard colour paint	The spot test of mustard coloured paint was carried out on the western changing room door.
9206.18/ LPST06	Paint	Lead in Paint <1.0%	Dressing Shed Interior	Door Jamb - White coloured paint	The spot test of white paint was carried on the door jamb of the western changing room door.
9206.18/ LPST07	Paint	Lead in Paint <1.0%	Dressing Shed Interior	Doors - Brown coloured paint	The spot test of brown paint was carried out on the western changing room door.



SAMPLE REGISTER

Prepared by Getex

Sample No.	Material Type	Analysis Result	Area Reference	Location	Sample Location
9206.18/ LPST08	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Timber Window infill panels - Green coloured paint	The spot test of green coloured paint was carried out on the western window infill panel.
9206.18/ LPST09	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Porch - Ceiling - White paint - Overcoat	The spot test of white overcoat paint was carried out centrally located adjacent to the building wall.
9206.18/ LPST11	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Porch - Ceiling - White paint - Undercoat	The spot test of white undercoat paint was carried out centrally located adjacent to the building wall.
9206.18/ LPST11	Paint	Lead in Paint <1.0%	Dressing Shed Interior	Change rooms - Walls - Green coloured paint	The spot test of green coloured paint was taken from the wall opposite the entrance door within the western change room.
9206.18/ LPST12	Paint	Lead in Paint <1.0%	Dressing Shed Interior	Groundsman's shed - Masonry walls - White paint	The spot test of white paint was carried out adjacent to the window.
9206.18/ LPST13	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Former male toilets (Cricket gear store) - Entrance door - Security bars - Grey coloured paint	The spot test of grey paint was carried out centrally on the security bars.
9206.18/ LPST14	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Former male toilets (Cricket gear store) - Entrance door - Security box around lock - Red coloured paint	The spot test of red paint was carried out on the eastern face of the security box.
9206.18/ LPST15	Paint	Lead in Paint <1.0%	Dressing Shed Exterior	Water tank - Brown coloured paint	The spot test of brown coloured paint was carried on the northern side of the water tank.



ASBESTOS SAMPLE ANALYSIS REPORT

Report Number: 9206.18.ANAT
Report Date: 5 November 2015

1. CLIENT DETAILS

Client Company: Ashfield Council
Client Contact: Ray McMaster
Client Address: 260 Liverpool Road
ASHFIELD NSW 2131

Date Sample Received: 29 September 2015

2. SCOPE

GETEX PTY LTD was requested by Ray McMaster of Ashfield Council to analyse one (1) sample for asbestos content. The analysis result only relates to the sample tested.

3. METHOD

The sample was analysed under a Stereomicroscope and selected fibres were analysed by Polarised Light Microscopy in conjunction with dispersion staining method (GETEX.BSA.01, NATA accreditation number 15404). This method is based on the AS 4964-2004 Method for the qualitative identification of asbestos in bulk samples.



NATA Accredited Laboratory.
Number: 15404

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Accredited for compliance with ISO/IEC 17025

This report shall not be reproduced except in full.

GETEX PTY LIMITED
ABN 99 116 287 471

Suite 2.02, Level 2, Waterloo Business Park
35 Waterloo Road, Macquarie Park NSW 2113
Phone: (02) 98892488 Fax: (02) 98892499
Email: help@getex.com.au Web: www.getex.com.au

4. RESULTS

Sample Number	Description	Analysis Result
9206.18/AS01	Sticky tape dust sample 50mm x19mm with grits of sand, paint flakes, fragments of fibre* board material, loose bundles of fibre* and strands of organic fibre.	*Chrysotile Asbestos Detected

5. LIMITATIONS

Although all work is performed to a professional and diligent standard, the potential variance between the practical limitations of the scope of work undertaken, the cost of our services, all possible issues of concern, and any loss or damages which may be associated with our work are such that we cannot warrant that all asbestos materials have been identified. We therefore limit any potential liability associated with our work to the cost of our services. Furthermore there can be no guarantee that a particular sample is typical of an extended area.

Kind Regards,



Geronimo Abrot BScMEng
Approved Identifier

QA/QC check by:



Lee Hands BSc Hons
Approved Signatory



NATA Accredited Laboratory.
Number:15404

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Accredited for compliance with ISO/IEC 17025

This report shall not be reproduced except in full.

9206ash18-ANAT

GETEX



12 Ashley Street, Chatswood, NSW 2067
tel: +61 2 9910 6200

email: sydney@envirolab.com.au
envirolab.com.au

Envirolab Services Pty Ltd - Sydney | ABN 37 112 535 645

CERTIFICATE OF ANALYSIS

135413

Client:

Getex Pty Ltd

2.02, Building 2 Waterloo Business Park
35 Waterloo Rd
North Ryde
NSW 2113

Attention: Peter Fox

Sample log in details:

Your Reference:	9206
No. of samples:	37 Paints, 18 Swabs
Date samples received / completed instructions received	06/10/15 / 06/10/15

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data.
Samples were analysed as received from the client. Results relate specifically to the samples as received.
Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date:	13/10/15 / 13/10/15
Date of Preliminary Report:	Not Issued

NATA accreditation number 2901. This document shall not be reproduced except in full.
Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:


Jacinta Hurst
Laboratory Manager

Envirolab Reference: 135413
Revision No: R 00



Page 1 of 8

Client Reference: 9206

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-1 9206.03/LP01 Paint	135413-2 9206.03/LP02 Paint	135413-3 9206.03/LP03 Paint	135413-4 9206.03/LP04 Paint	135413-5 9206.03/LP05 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	7.8	<0.05	2.8	0.96	4.6

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-6 9206.03/LP06 Paint	135413-8 9206.04/LP01 Paint	135413-9 9206.04/LP02 Paint	135413-10 9206.04/LP03 Paint	135413-11 9206.04/LP04 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	<0.05	11	3.7	4.5	1.2

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-15 9206.05/LP01 Paint	135413-16 9206.05/LP02 Paint	135413-17 9206.05/LP03 Paint	135413-18 9206.05/LP04 Paint	135413-21 9206.09/LP01 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	14	4.0	1.5	0.3	0.2

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-22 9206.09/LP02 Paint	135413-23 9206.09/LP03 Paint	135413-24 9206.09/LP04 Paint	135413-25 9206.09/LP05 Paint	135413-26 9206.09/LP06 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	0.98	0.1	0.07	0.1	0.1

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-27 9206.09/LP07 Paint	135413-28 9206.10- 1/LP01 Paint	135413-29 9206.10- 1/LP02 Paint	135413-32 9206.12/LP01 Paint	135413-33 9206.12/LP02 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	0.08	13	0.3	0.2	1.3

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-34 9206.12/LP03 Paint	135413-35 9206.12/LP04 Paint	135413-37 9206.13/LP01 Paint	135413-38 9206.13/LP02 Paint	135413-39 9206.14/LP01 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	0.50	0.08	0.09	0.1	0.1

Envirolab Reference: 135413
Revision No: R 00

Page 2 of 8

Client Reference: 9206

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-41 9206.16/LP01 Paint	135413-42 9206.16/LP02 Paint	135413-46 9206.18/LP01 Paint	135413-48 9206.20/LP01 Paint	135413-53 9206.24/LP01 Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	<0.05	5.5	0.2	0.08	10

Lead in Paint Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-54 9206.24/LP02 Paint	135413-55 9206.24/LP03 Paint	135413-56 9206.09/LP02 - TRIPLICATE Paint
Date prepared	-	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	12/10/2015	12/10/2015	12/10/2015
Lead in paint	%w/w	3.1	<0.05	<0.05

Envirolab Reference: 135413
Revision No: R 00

Page 3 of 8

Client Reference: 9206

Lead in swab Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-7 9206.03/LD01 Swab	135413-12 9206.04/LD01 Swab	135413-13 9206.04/LD02 Swab	135413-14 9206.04/LD03 Swab	135413-19 9206.07/LD01 Swab
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Lead in Swabs	µg/swab	87	590	13,000	26	10

Lead in swab Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-20 9206.08/LD01 Swab	135413-30 9206.10- 2/LD01 Swab	135413-31 9206.10- 2/LD02 Swab	135413-36 9206.12/LD01 Swab	135413-40 9206.14/LD01 Swab
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Lead in Swabs	µg/swab	15	68	4	4,100	88

Lead in swab Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-43 9206.16/LD01 Swab	135413-44 9206.16/LD02 Swab	135413-45 9206.17/LD01 Swab	135413-47 9206.19/LD01 Swab	135413-49 9206.20/LD01 Swab
Date prepared	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	08/10/2015	08/10/2015	08/10/2015	08/10/2015	08/10/2015
Lead in Swabs	µg/swab	30	370	13	220	160

Lead in swab Our Reference: Your Reference Type of sample	UNITS ----- -----	135413-50 9206.20/LD02 Swab	135413-51 9206.23/LD01 Swab	135413-52 9206.23/LD02 Swab
Date prepared	-	08/10/2015	08/10/2015	08/10/2015
Date analysed	-	08/10/2015	08/10/2015	08/10/2015
Lead in Swabs	µg/swab	290	270	74

Envirolab Reference: 135413
Revision No: R 00

Page 4 of 8

Client Reference: 9206

MethodID	Methodology Summary
Metals-004	Digestion of Paint chips/scrapings/liquids for Metals determination by ICP-AES/MS and or CV/AAS.
Metals-005	Digestion of Dust wipes/swabs and /or miscellaneous samples for Metals determination by ICP-AES/MS and/or CV-AAS

Envirolab Reference: 135413
Revision No: R 00

Page 5 of 8

Client Reference: 9206

QUALITY CONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
Lead in Paint						Base Duplicate %RPD		
Date prepared	-			08/10/2015	135413-2	08/10/2015 08/10/2015	LCS-1	08/10/2015
Date analysed	-			12/10/2015	135413-2	12/10/2015 12/10/2015	LCS-1	12/10/2015
Lead in paint	%w/w	0.05	Metals-004	<0.05	135413-2	<0.05 <0.05	LCS-1	107%
QUALITY CONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
Lead in swab						Base Duplicate %RPD		
Date prepared	-			08/10/2015	[NT]	[NT]	LCS-1	08/10/2015
Date analysed	-			08/10/2015	[NT]	[NT]	LCS-1	08/10/2015
Lead in Swabs	µg/swab	1	Metals-005	<1	[NT]	[NT]	LCS-1	102%
QUALITY CONTROL	UNITS		Dup. Sm#		Duplicate		Spike Sm#	Spike % Recovery
Lead in Paint					Base + Duplicate + %RPD			
Date prepared	-		135413-15		08/10/2015 08/10/2015		LCS-2	08/10/2015
Date analysed	-		135413-15		12/10/2015 12/10/2015		LCS-2	12/10/2015
Lead in paint	%w/w		135413-15		14 17 RPD: 19		LCS-2	105%
QUALITY CONTROL	UNITS		Dup. Sm#		Duplicate		Spike Sm#	Spike % Recovery
Lead in Paint					Base + Duplicate + %RPD			
Date prepared	-		135413-22		08/10/2015 08/10/2015		LCS-3	08/10/2015
Date analysed	-		135413-22		12/10/2015 12/10/2015		LCS-3	12/10/2015
Lead in paint	%w/w		135413-22		0.98 0.5 RPD: 65		LCS-3	105%
QUALITY CONTROL	UNITS		Dup. Sm#		Duplicate			
Lead in Paint					Base + Duplicate + %RPD			
Date prepared	-		135413-26		08/10/2015 08/10/2015			
Date analysed	-		135413-26		12/10/2015 12/10/2015			
Lead in paint	%w/w		135413-26		0.1 0.1 RPD: 0			
QUALITY CONTROL	UNITS		Dup. Sm#		Duplicate			
Lead in Paint					Base + Duplicate + %RPD			
Date prepared	-		135413-46		08/10/2015 08/10/2015			
Date analysed	-		135413-46		12/10/2015 12/10/2015			
Lead in paint	%w/w		135413-46		0.2 0.2 RPD: 0			
QUALITY CONTROL	UNITS		Dup. Sm#		Duplicate			
Lead in Paint					Base + Duplicate + %RPD			
Date prepared	-		135413-53		08/10/2015 08/10/2015			
Date analysed	-		135413-53		12/10/2015 12/10/2015			
Lead in paint	%w/w		135413-53		10 9.9 RPD: 1			

Envirolab Reference: 135413
Revision No: R 00

Page 6 of 8

Client Reference: 9206

Report Comments:

Acid Extractable Metals in Soil: The laboratory RPD acceptance criteria has been exceeded for 135413-22 for Pb. Therefore a triplicate result has been issued as laboratory sample number 135413-56.

Acid Extractable Metals in Paint: Sample 22; paint is bonded to substrate, every effort has been made to scrape the paint off.

Asbestos ID was analysed by Approved Identifier:	Not applicable for this job
Asbestos ID was authorised by Approved Signatory:	Not applicable for this job

INS: Insufficient sample for this test

NA: Test not required

<: Less than

PQL: Practical Quantitation Limit

RPD: Relative Percent Difference

>: Greater than

NT: Not tested

NA: Test not required

LCS: Laboratory Control Sample

Envirolab Reference: 135413
Revision No: R 00

Page 7 of 8

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike : A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample) : This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.



Envirolab Services Pty Ltd
ABN 37 112 535 645
12 Ashley St Chatswood NSW 2067
ph 02 9910 6200 fax 02 9910 6201
enquiries@envirolabservices.com.au
www.envirolabservices.com.au

SAMPLE RECEIPT ADVICE

Client Details	
Client	Getex Pty Ltd
Attention	Peter Fox

Sample Login Details	
Your Reference	9206
Envirolab Reference	135413
Date Sample Received	06/10/2015
Date Instructions Received	06/10/2015
Date Results Expected to be Reported	13/10/2015

Sample Condition	
Samples received in appropriate condition for analysis	YES
No. of Samples Provided	37 Paints, 18 Swabs
Turnaround Time Requested	Standard
Temperature on receipt (°C)	NA
Cooling Method	Not applicable
Sampling Date Provided	Not Provided on the COC

Comments
Samples will be held for 1 month for water samples and 2 months for soil samples from date of receipt of samples

Please direct any queries to:

Aileen Hie	Jacinta Hurst
Phone: 02 9910 6200	Phone: 02 9910 6200
Fax: 02 9910 6201	Fax: 02 9910 6201
Email: ahie@envirolabservices.com.au	Email: jhurst@envirolabservices.com.au

Sample and Testing Details on following page

<i>Sample Id</i>	<i>Lead in Paint</i>	<i>Lead in swab</i>
9206.03/LP01	✓	
9206.03/LP02	✓	
9206.03/LP03	✓	
9206.03/LP04	✓	
9206.03/LP05	✓	
9206.03/LP06	✓	
9206.03/LD01		✓
9206.04/LP01	✓	
9206.04/LP02	✓	
9206.04/LP03	✓	
9206.04/LP04	✓	
9206.04/LD01		✓
9206.04/LD02		✓
9206.04/LD03		✓
9206.05/LP01	✓	
9206.05/LP02	✓	
9206.05/LP03	✓	
9206.05/LP04	✓	
9206.07/LD01		✓
9206.08/LD01		✓
9206.09/LP01	✓	
9206.09/LP02	✓	
9206.09/LP03	✓	
9206.09/LP04	✓	
9206.09/LP05	✓	
9206.09/LP06	✓	
9206.09/LP07	✓	
9206.10-1/LP01	✓	
9206.10-1/LP02	✓	
9206.10-2/LD01		✓
9206.10-2/LD02		✓
9206.12/LP01	✓	
9206.12/LP02	✓	
9206.12/LP03	✓	
9206.12/LP04	✓	
9206.12/LD01		✓
9206.13/LP01	✓	
9206.13/LP02	✓	
9206.14/LP01	✓	
9206.14/LD01		✓
9206.16/LP01	✓	
9206.16/LP02	✓	
9206.16/LD01		✓
9206.16/LD02		✓
9206.17/LD01		✓
9206.18/LP01	✓	



Envirolab Services Pty Ltd
 ABN 37 112 535 645
 12 Ashley St Chatswood NSW 2067
 ph 02 9910 6200 fax 02 9910 6201
 enquiries@envirolabservices.com.au
 www.envirolabservices.com.au

9206.19/LD01		✓
9206.20/LP01	✓	
9206.20/LD01		✓
9206.20/LD02		✓
9206.23/LD01		✓
9206.23/LD02		✓
9206.24/LP01	✓	
9206.24/LP02	✓	
9206.24/LP03	✓	



From: Getex Pty Ltd
Address: 2.02, Building 2, Waterloo Business Park
35 Waterloo Road
North Ryde NSW 2113
Phone: (02) 9889 2488
Facsimile: (02) 9889 2499
Email: help@getex.com.au
Attention: Peter Fox

CHAIN OF CUSTODY FORM

To: Envirolab Services Pty Ltd
Address: 12 Ashley
Chatswood NSW 2067
Phone: (02) 9910 6200
Facsimile: (02) 9958 5803

Date: 2/10/2015
Order No.: 5384
Project No.: 9206

TAT Required: 5 Day TAT

☐ Standard Water Detection Limits (ANZECC 2000 95%) ☐ Special Water Detection Limits
(Please advise of additional charges)

☐ Samples received at ambient temperature ☐ Samples received chilled Received by (signature) CALUM CB. Date: 6.10.15.

Envirolab Barcode Number	GETEX Sample Number	Container Plastic Tube – PT Bag – B Petri Dish – PD Plastic Bottle – PB Glass Jar – GJ Glass Bottle – GB Glass Vial - GV	Soil								DDG Content										Paint/Dust Filters/ Wipes		
			TPH/BTEX	Metals ¹	PAH	OC/OP/PCB	VOC	Leachate Metals ² (mg/L)	Leachate PAH (mg/L)	Other	Ash & Comb. Matter	Total Soluble Matter	Total Insoluble Matter	Total Solids							Other	Lead (mg/kg)	Lead Total (mg)
135413.																							
1	9206.03/LP01	PT																			X		
2	9206.03/LP02	PT																			X		
3	9206.03/LP03	PT																			X		
4	9206.03/LP04	PT																			X		
5	9206.03/LP05	PT																			X		
6	9206.03/LP06	PT																			X		
7	9206.03/LD01	PT																				X	
8	9206.04/LP01	PT																			X		
9	9206.04/LP02	PT																			X		
10	9206.04/LP03	PT																			X		
11	9206.04/LP04	PT																			X		
12	9206.04/LD01	PT																				X	
13	9206.04/LD02	PT																				X	
14	9206.04/LD03	PT																				X	
15	9206.05/LP01	PT																			X		

9206env01-COC
GETEX Form Lab.016 (Edition 1; 7 November 2005)

GETEX

Envirolab Barcode Number	GETEX Sample Number	Container Plastic Tube – PT Bag – B Petri Dish – PD Plastic Bottle – PB Glass Jar – GJ Glass Bottle – GB Glass Vial – GV	Soil								DDG Content										Paint/Dust Filters/ Wipes		
			TPH/BTEX	Metals ¹	PAH	OC/OP/PCB	VOC	Leachate Metals ² (mg/L)	Leachate PAH (mg/L)	Other	Ash & Comb. Matter	Total Soluble Matter	Total Insoluble Matter	Total Solids						Other	Lead (mg/kg)	Lead Total (mg)	Other
135413																							
16	9206.05/LP02	PT																			X		
17	9206.05/LP03	PT																			X		
18	9206.05/LP04	PT																			X		
19	9206.07/LD01	PT																				X	
20	9206.08/LD01	PT																				X	
21	9206.09/LP01	PT																			X		
22	9206.09/LP02	PT																			X		
23	9206.09/LP03	PT																			X		
24	9206.09/LP04	PT																			X		
25	9206.09/LP05	PT																			X		
26	9206.09/LP06	PT																			X		
27	9206.09/LP07	PT																			X		
28	9206.10-1/LP01	PT																			X		
29	9206.10-1/LP02	PT																			X		
30	9206.10-2/LD01	PT																				X	
31	9206.10-2/LD02	PT																				X	
32	9206.12/LP01	PT																			X		
33	9206.12/LP02	PT																			X		
34	9206.12/LP03	PT																			X		
35	9206.12/LP04	PT																			X		
36	9206.12/LD01	PT																				X	
37	9206.13/LP01	PT																			X		
38	9206.13/LP02	PT																			X		

